

RP-7000 Pro

15" or 17" Multifunctional Fan-less
Wall-Mount Terminal



RP-7000 wall-mount terminal is specifically designed to create a seamless look. With a selection of optional integrated peripherals such as barcode scanner and speakers, the terminal can be enhanced to perform as a price checker or broadcasting system.



Features

Fan-less Design with Slim Frame

Quiet and slim fan-less design allows terminal to be implemented in a variety of environments



Optional Integrated Barcode Scanner and Speakers


RP-7000 Pro is an effective price checker, interactive product information and advertising broadcaster to enhance the customer experience.




Downward Facing I/O Connector Panel

Wires are connected downward reducing space needed between the terminal and wall

I/O Interface

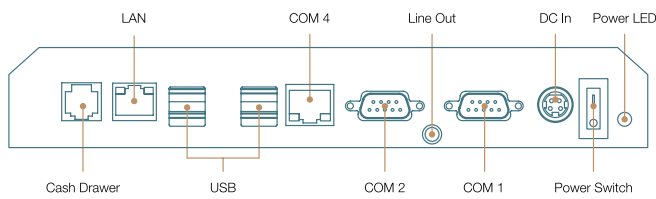

Dimensions

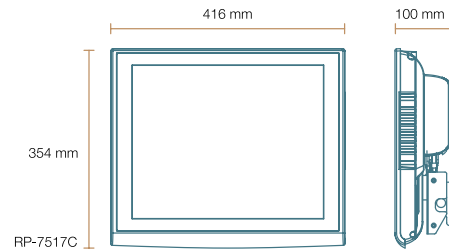

Specifications

Model	RP-7512C / RP-7512PC	RP-7515C / RP-7515PC	RP-7517C / RP-7517PC
Processor	Intel® Atom™ N270, 512K L2 Cache, 1.6Ghz, 533Mhz FSB		
System Memory	1 GB Standard, Maximum 4 GB (2 x 200-pin DDR2)		
Power Supply	150W (12V / 12.5A) External Power Adaptor		
Storage Device	1 x 2.5" SATA HDD		
Speaker	Internal Speaker 2W x 2 (Must Come with Scanner Module)		
Construction	Aluminum Die-casting, Plexi-Glass Acrylic (Front Bezel)		
Housing Color	Black / Silver		
Touch LCD Display			
Size / Resolution	12" TFT LCD / 800 x 600	15" TFT LCD / 1024 x 768	17" TFT LCD / 1280 x 1024
Brightness (Backlight)	230 cd/m ² / 400 cd/m ² (CCFL)	250 / 350 cd/m ² (CCFL)	350 cd/m ² (CCFL)
	450 cd/m ² (LED)		
Touch Screen	5-Wire Resistive Touch	5-Wire Resistive Touch / IR Touch	5-Wire Resistive Touch
I/O Ports			
Serial Port	1 x Internal: COM3 (Touch) 3 x External: COM1, COM2 (DB9), COM4 (RJ45)		
USB Port	4 x Internal (1 2-in1 Module, 1 WiFi, 2 Reserved), 4 x External		
Cash Drawer Port	1 x RJ11 (12V)		
LAN Port	1 x RJ45 Giga LAN		
Audio Port	1 x Line-out		
OS Supported			
Windows	Windows XP, Windows XPE, POSReady 2009, Windows 7		
Linux	Per Request		
Physical Dimensions			
Dimensions (WxHxD)	345 x 255 x 89 mm	374 x 316 x 92 mm	416 x 354 x 100 mm
Environment			
EMI / Safety	CE, FCC Class A		
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)		
Storage Temperature	-10°C ~ 55°C (14°F ~ 131°F)		
Relative Humidity	10% ~ 90% (Non-condensing)		
Optional Peripherals			
Magnetic Stripe Card Reader	Integrated MCR Module (Single / Dual / Triple Track Selectable)		
2-in-1 / 3-in-1 Module	Integrated MCR + i-Button / MCR + RFID / MCR + Fingerprint / MCR + Smartcard + i-Button		
Scanner Module	Integrated Laser Scanner: Metrologic IS3480 with speaker 2W x 2		
Wireless LAN	Integrated 802.11 b/g/n Wireless Module		
2nd Storage Device	SATA DOM		